


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 15 TOWNSHIP 16 RANGE 5
DATE: 10-01-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-22-97

IN. S.P.C. E ZONE NAD '83
NAME: 16051501
N: 509925.6690(m)
E: 73833.3640(m)

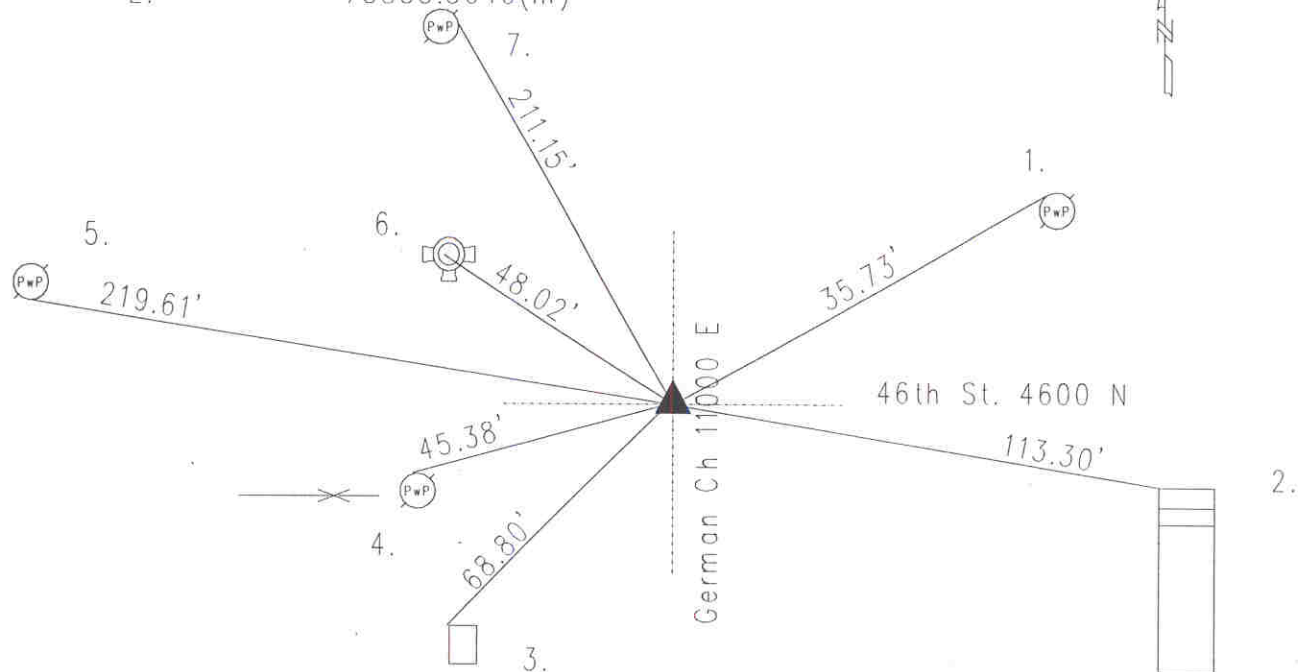

Original post set 1820 by Hendricks with witness: 7" ash N 23 W 16 links; 6" buckeye S 83 E 8 links per Marion County Atlas pg. 15. Hosbrook 9-1-1851 called stone with witness: 22" hackberry S 66 E 66 links, 16" beech S 29 E 75 links per Lawrence Township Legal Survey Book pg. 57. Giosio in 1949 referenced but did not call out type of marker. Monroe 3-1-58 called pipe over stone. Burres 8-9-63 called same. MCSO 3-15-66 called same. McLand 4-6-70 called a brass plug in steel box. Fortner 3-13-75 called same. Gries 2-29-88 called same. Wilcoxon 10-3-96 called same. Excavated by Wilcoxon 10-22-97 and Harrison set. Re-tied 10-01-03 by Wilcoxon. 16051501

REF.	DISTANCE	DESCRIPTION
1.	35.73'	PK nail w/brass washer NW light pole 12"up
2.	113.30'	NW corner of bottom step
3.	68.80'	NW corner tomb stone : Dalton T. Smith
4.	45.38'	Road nail N PwP#67-381 D
5.	219.61'	PK nail S guide pole 36"up
6.	48.02'	Top nut of fire hydrant
7.	211.15'	PK nail E PwP#68-381 D 40"up